

POLICY NO.:

NAMED INSURED:

WOODBURNING STOVE(S) IS/ARE THE ONLY SOURCE OF HEAT? YES NO

MANUFACTURED OR HOME-BUILT?

IS LABEL OF RECOGNIZED TESTING LABORATORY PERMANENTLY ATTACHED? YES NO

IF YES,

UL OTHER

TYPE OF STOVE

RADIANT OPEN DRAFT (non-airtight)

COOK STOVE

RADIANT AIRTIGHT (gasket mounted)

CENTRAL WOODBURNING FURNACE

CIRCULATING (double enclosure)

FIREPLACE INSERT

ADD-ON WOODBURNING

FURNACE

ATTACHED TO

GAS OIL

CONSTRUCTION

PLATE STEEL

CAST IRON

SHEET METAL

INSTALLED BY

OWNER

CONTRACTOR

CHIMNEY – FLUE

TYPE OF CHIMNEY

MASONRY WITHOUT LINER

MASONRY WITH LINER

DOUBLE WALL INSULATED METAL

TRIPLE WALL THERMAL

SINGLE WALL METAL

HOW OFTEN IS CHIMNEY CLEANED?

BY WHOM?

CONTRACTOR SELF

TOTAL NUMBER OF HEATING UNITS CONNECTED TO SAME CHIMNEY?

IF MORE THAN ONE, DOES CHIMNEY HAVE SEPARATE FLUES?

YES NO

HAS THERE EVER BEEN A CHIMNEY FIRE?

YES NO

IF YES, HAS THE CHIMNEY BEEN INSPECTED BY A PROFESSIONAL AFTER THE FIRE?

YES NO

CHIMNEY CONNECTOR / STOVEPIPE

TYPE OF CONNECTOR (check one)

NO CONNECTOR – FACTORY BUILT CHIMNEY ATTACHED DIRECTLY TO UNIT

STOVEPIPE ATTACHED DIRECTLY TO MASONRY CHIMNEY

STOVEPIPE CONNECTS CHIMNEY THROUGH COMBUSTIBLE WALL, CEILING OR FLOOR

IF THIS TYPE, ANSWER "PROTECTION / CLEARANCE" QUESTIONS A – D BELOW

A. SHORT INSULATED FACTORY BUILT WALL SLEEVE/CHIMNEY SECTION W/ AT LEAST 8" CLEARANCE YES NO

B. FIRE CLAY THIMBLE IN SOLID MASONRY WITH AT LEAST 8" CLEARANCE YES NO

C. METAL VENTILATED THIMBLE WITH AT LEAST 6" CLEARANCE YES NO

D. WALL CUT BACK FROM PIPE WITH AT LEAST 18" CLEARANCE YES NO

IF WALL CUT BACK, OPENING IS COVERED BY

STOVEPIPE

VERTICAL DIAMETER

LENGTH

OF ELBOWS

HORIZONTAL DIAMETER

LENGTH

OF ELBOWS

PROTECTION

- IS SOMEONE ON THE PREMISES DURING THE DAY WHEN UNIT IS IN USE? YES NO
- IS THERE AN ABC (all classes) FIRE EXTINGUISHER ON HAND? YES NO
- IS THERE AT LEAST ONE (1) SMOKE ALARM ON THE PREMISES? YES NO
- IS STOVE CLEANED ONCE PER YEAR OR MORE? YES NO

EXPOSURES TO COMBUSTIBLE MATERIAL INCLUDING DRYWALL, PLASTER OR BLOCK OVER WOODSTOVE

- FLOOR MATERIAL COMBUSTIBLE? YES NO
- IF YES, IS THERE ANY PROTECTIVE COVERING? YES NO

STOVE FOUNDATION IS NON-COMBUSTIBLE MATERIAL WITH:

- AT LEAST 18" CLEARANCE FRONT AND SIDES? YES NO

IF NO, INDICATE CLEARANCE DISTANCE

- AT LEAST 6" CLEARANCE REAR? YES NO

IF NO, INDICATE CLEARANCE DISTANCE

- PROTECTIVE COVERING ON WALLS YES NO
- PROTECTIVE COVERING ON CEILING? YES NO

IF YES, DESCRIBE MATERIAL:

(asbestos, millboard, minimum 28 gauge sheet metal, etc.)


MINIMUM OF 1" VENTED AIR SPACE ON ALL FOUR SIDES BETWEEN PROTECTIVE COVERING AND

- WALLS? YES NO
- CEILING? YES NO


- STANDOFFS OR SPACERS NONCOMBUSTIBLE (metal, ceramic, etc.) YES NO

MEASURE AND INDICATE DISTANCES AS ILLUSTRATED BELOW

1.

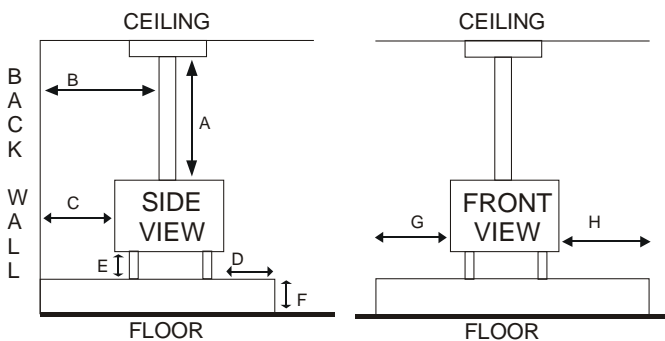

2.

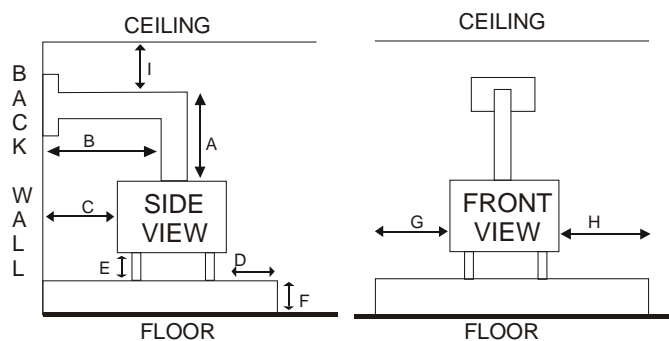

MEASUREMENT

ADDITIONAL REMARKS

- A LENGTH OF STOVEPIPE
- B DISTANCE FROM STOVEPIPE TO NEAREST WALL
- C DISTANCE FROM BACK OF STOVE TO NEAREST WALL
- D DISTANCE FROM FRONT OF STOVE TO EDGE OF FLOOR MATERIAL
- E LENGTH OF LEGS
- F THICKNESS OF FLOORING MATERIAL
- G DISTANCE FROM STOVE TO EDGE OF FLOORING
- H DISTANCE FROM STOVE TO EDGE OF FLOORING
- I DISTANCE FROM STOVEPIPE TO CEILING

Applicable in WA: It is a crime to knowingly provide false, incomplete or misleading information to an insurance company for the purpose of defrauding the company. Penalties include imprisonment, fines and denial of insurance benefits.

Applicable in OR: Any person who knowingly and with intent to defraud the insurer by submitting an application containing a false statement as to any material fact may be violating state law.

This form shall be attached to, and made part of, the fully completed Acord application by the applicant.